






Mechanical

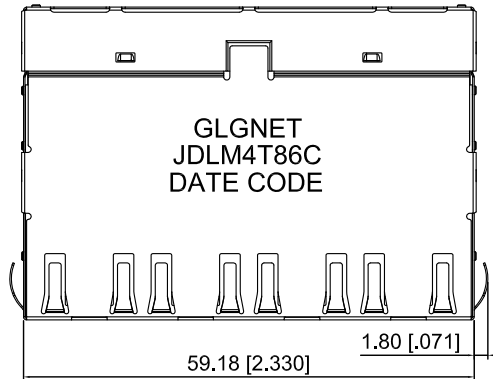

GoldPlating	Option
1.8μ"	☐
3μ"	☐
6μ"	☐
15μ"	☐
30μ"	☒
50μ"	☐

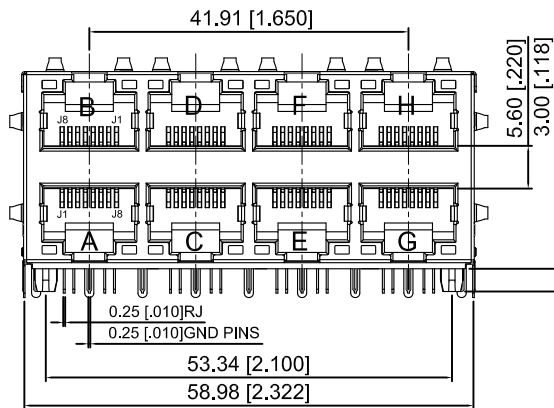



1. 胶纸厚度0.80
2. 胶纸平齐铁壳卷边

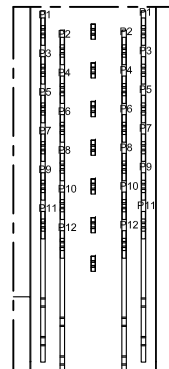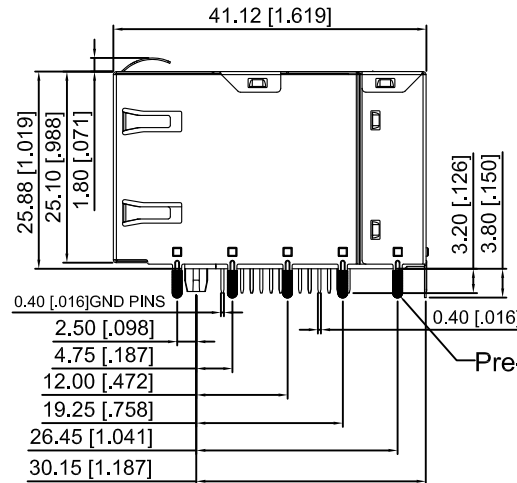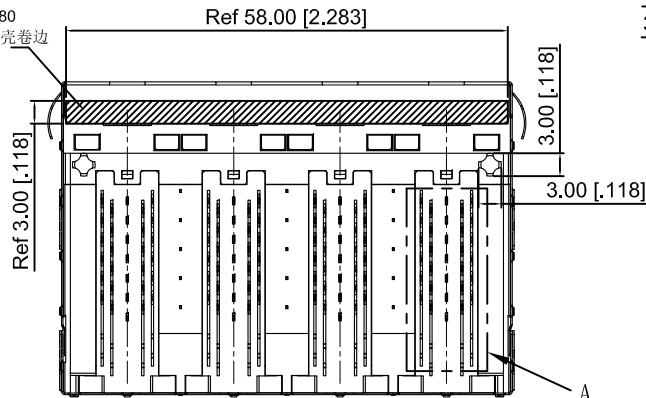

MATERIALS

- 1.HOUSING:GLASS FILLED PA6T(BLACK) UL94V-0(ROHS)
- 2.CONTACT: PHOSPHOR BRONZE,50-100 MICROINCHES MIN. OVERALL DUCTILE NICKEL UNDERPLATE WITH SELECTED 30 MICROINCHES GOLD AT MATING INTERFACE
- 3.SHIELD:0.2mm THICKNESS WITH BRASS.
- 4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 SUBPART F
- 5.THE PART IS RECOMMENDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260°C MAX,10 SECS MAX.
- 6.OPERATING TEMPERATURE:0°C TO +70°C.
STORAGE TEMPERATURE:-40°C TO +85°C.

Description				GLGNET® 深圳方向电子有限公司 SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.			
RJ45 2X4 Through Hole 5G Base-T W/O LED				料号 ITEM NO.	44469-02M231	设计 DRAW	WANGKG
Dimension Tolerance: 0.xx:±0.10[.004] x.xx:±0.25[.010] xx.xx:±0.25[.010]				品名 TITLE	JDLM4T86C	校对 CHECK	DANNY
				客户 CUSTOMER		核准 APPROVAL	BYANG
比例 SCALE	1:1	单位 UNIT	mm	图号 DWG NO.		日期 DATE	08/28/2020
张数 SHEET	1/3	备注 REMARK		角法 PROJ.		版本 REV	A0

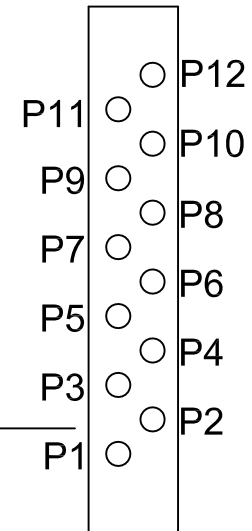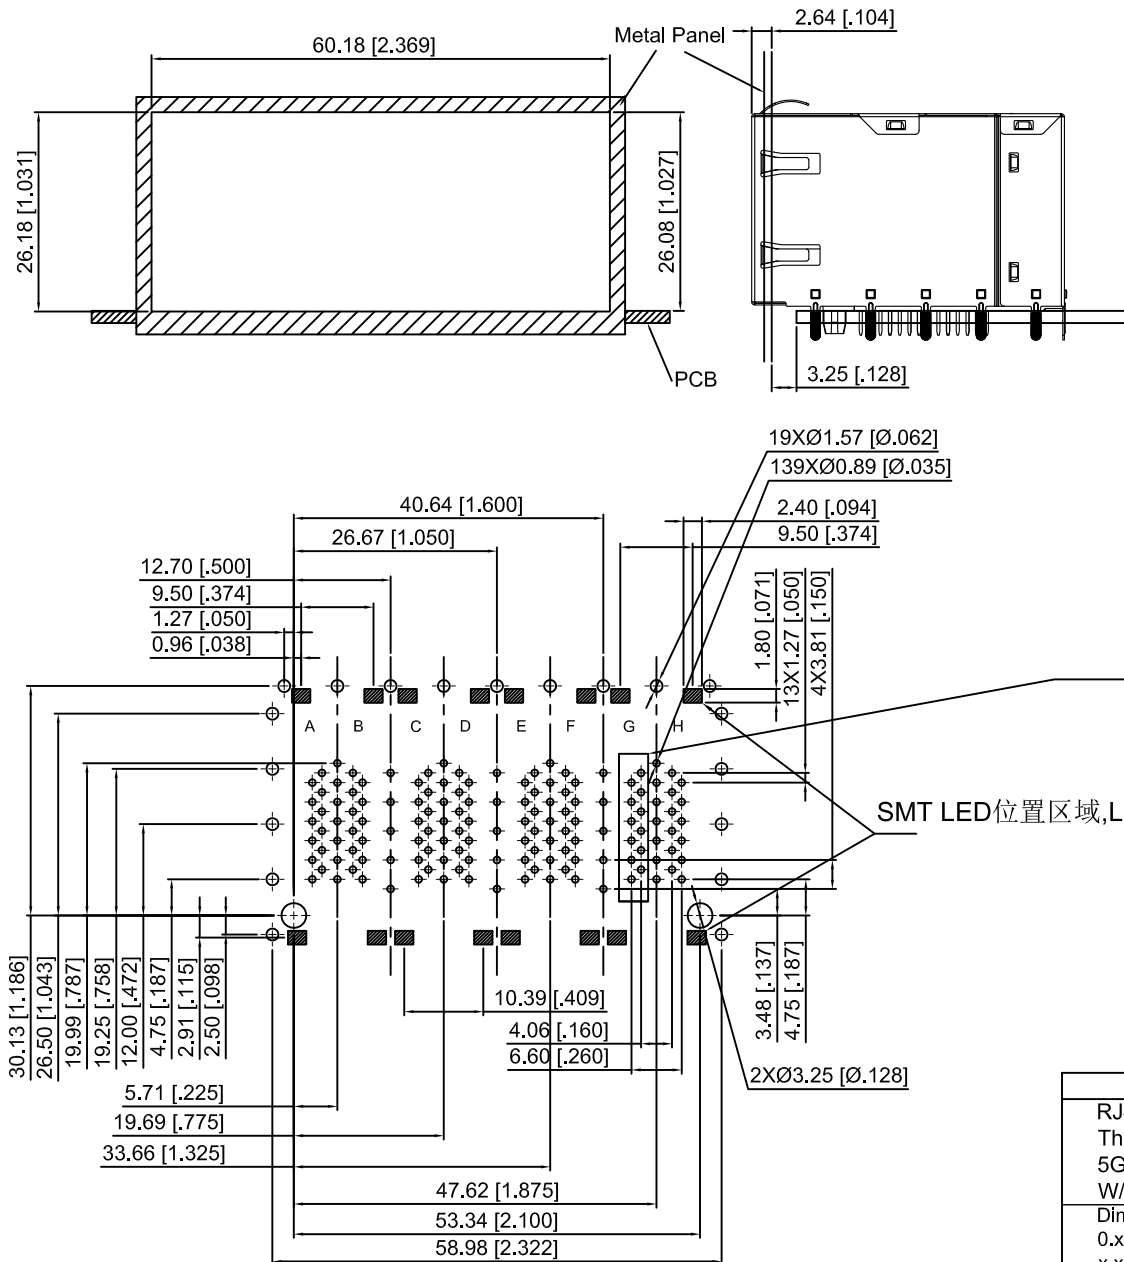

RECOMMENDED P.C.B LAYOUT TOP VIEW (COMPONENT SIDE) Dimension Tolerance: PCB LAYOUT Tolerances:±0.05[0.002]

Description				GLGNET® 深圳方向电子有限公司 SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.			
RJ45 2X4 Through Hole 5G Base-T W/O LED Dimension Tolerance: 0.xx:±0.10[.004] x.xx:±0.25[.010] xx.xx:±0.25[.010]				料号 ITEM NO.	44469-02M231	设计 DRAW	WANGKG
				品名 TITLE	JDLM4T86C	校对 CHECK	DANNY
				客户 CUSTOMER		核准 APPROVAL	BYANG
比例 SCALE	1:1	单位 UNIT	mm	图号 DWG NO.		日期 DATE	08/28/2020
张数 SHEET	2/3	备注 REMARK		角法 PROJ.		版本 REV	A0

