
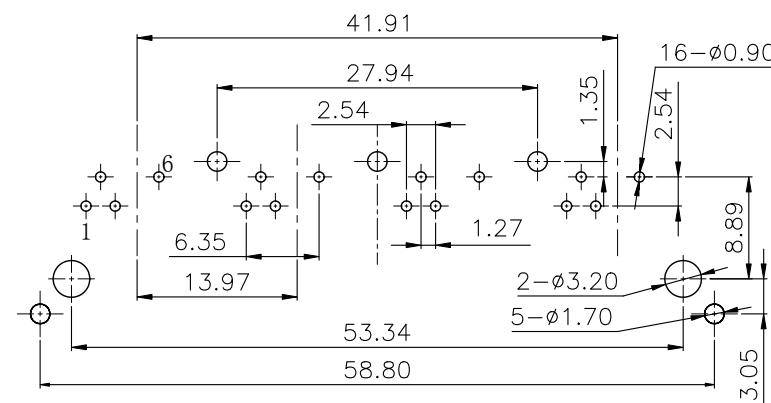
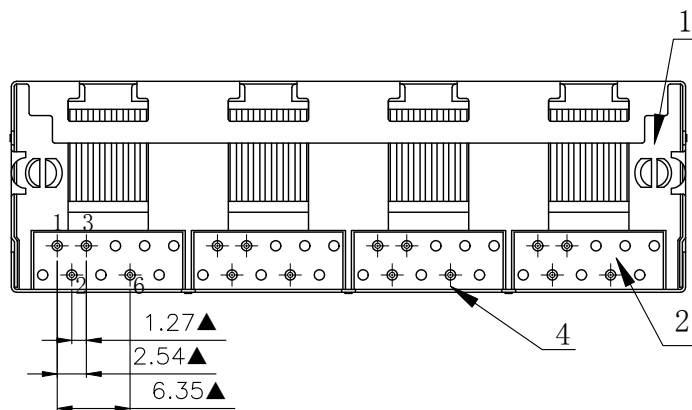

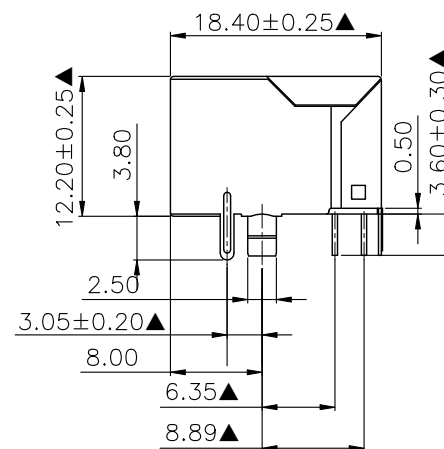


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE

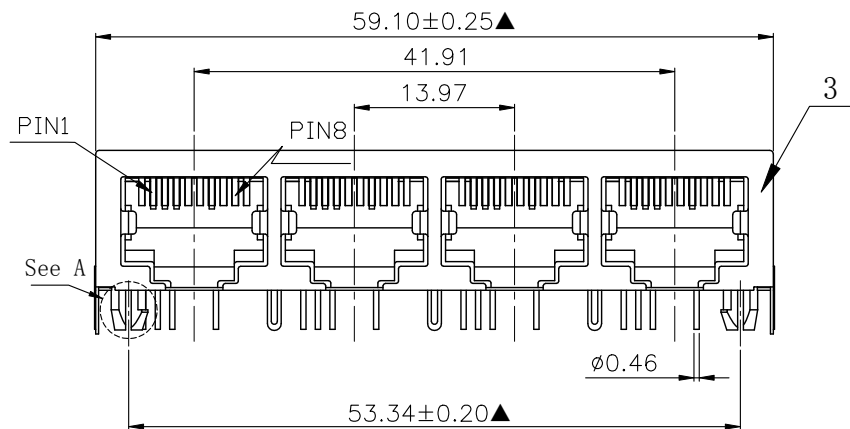

Mechanical Characteristic:

- Housing: Glass Filled PA46 Black UL94V-0 (RoHS).
 - Insert: Glass Filled PBT UL94V-0 (RoHS).
 - Shielding: 0.20mm Thickness Copper Alloy with Nickel Plated (RoHS).
 - Contact: 0.46mm DIA Phosphor Bronze gold Plating Over Nickel (RoHS).
 - Durability: 750 Cycles Min;
 - Connector Mating/Unmating Force: 30N Max.
 - Plug Retention Force: 45N min, 60s±5s;
- ※ MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 ※ The Dimensions Marked "▲" Symbols Are Stand For Key Characteristics.

Electrical Characteristic:

- Voltage Rating: 150 VAC RMS;
- Current Rating: 1.5 A Max @25° C;
- Insulation Resistance: 500 MΩ Min. @500 VDC;

41021-0 0 G X X 1

规格流水码

电镀代码

05-G/F

11-3u"

15-6u"

19-15u"

RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE ±0.05)

产品客户图 Customer Drw			GLGNET® 深圳市方向电子股份有限公司 SHEN ZHEN GLGNET ELECTRONICS CO., LTD.			
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X .XX .XXX X°	±0.35 ±0.25 ±0.15 ±2°				
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN		品名 TITLE	5622-S-D-1x4-4C-III
张数 SHEET	1/1	大小 SIZE	校对 CHECKED		料号 ITEM NO.	41021-00GXX1
单位 UNIT	mm	版本 REV.	核准 APPROVED		图号 DWG NO.	GLG-W0-226