


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

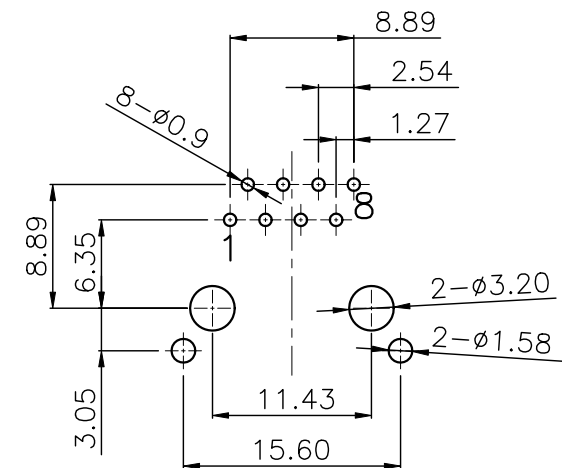

RECOMMENDED P.C.B LAYOUT(±0.05)
TOP VIEW (COMPONENT SIDE)

MATERIALS:

1. Housing: Glass Filled PA46 Black UL94V-0 (RoHS).
 2. Insert: Glass Filled PBT UL94V-0 (ROHS).
 3. Contact: 0.46mm DIA Phosphor Bronze gold Plating Over Nickel (RoHS).
 4. Shielding: 0.20mm Thickness Copper Alloy with Nickel Plated (RoHS).
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※The Dimensions Marked "▲" Symbols Are Stand For Key Characteristics.

产品客户图 Customer Drw				GLGNET ® 深圳市方向电子股份有限公司 Shenzhen GLGNET Electronics Co.,LTD.			
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X .XX .XXX X°	±0.35 ±0.25 ±0.15 ±2°					
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN		品名 TITLE	5321-T-D-8C	
张数 SHEET	1/1	大小 SIZE	校对 CHECKED		料号 ITEM NO.	41038-00GXX1	
单位 UNIT	mm	版本 REV.	核准 APPROVED		图号 DWG NO.	GLG-W0-013	

41038-0 0 G X X 1

规格流水码 ————— 电镀代码

—05-G/F
—11-3u"
—15-6u"
—19-15u"

