

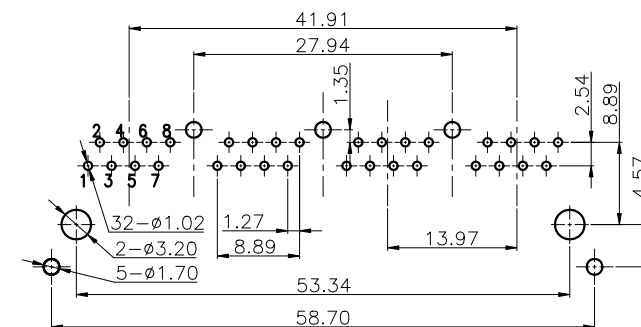
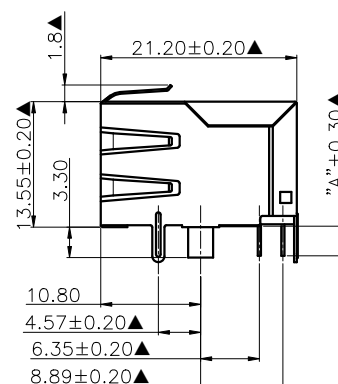


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1.					
2.					

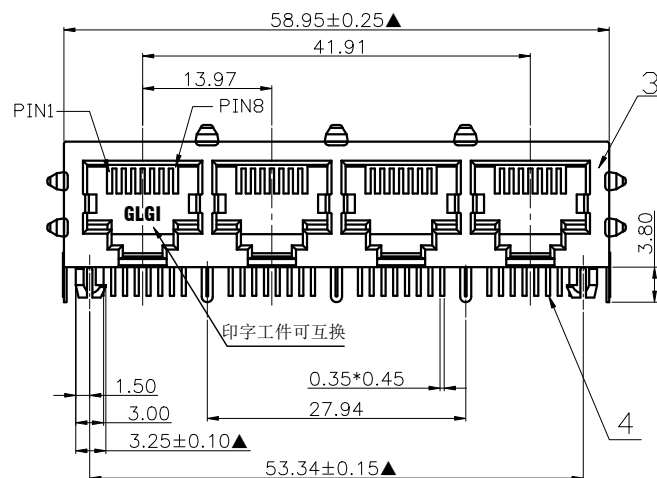

RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE DIM'±0.05)

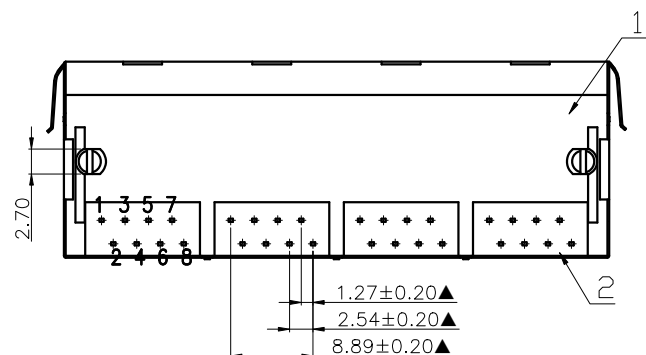


41122-00 X X X 1

规格流水码

电镀规格
S 半金亮锡
M 半金雾锡

电镀代码
05-G/F
09-2u"
11-3u"
15-6u"
19-15u"
23-30u"
24-50u"

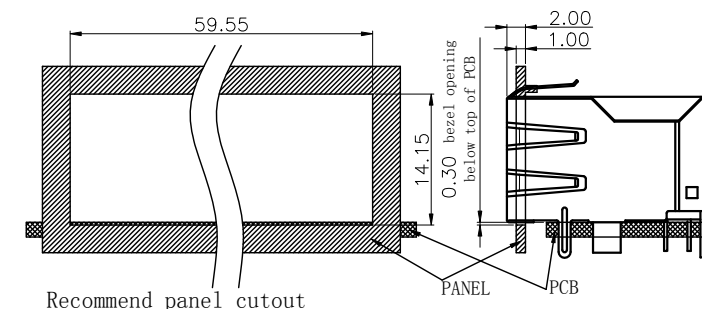

MATERIALS:

- Housing:Glass Filled PA46 BLACK UL94V-0(ROHS).
- Insert:Glass Filled PBT UL94V-0(ROHS).
- Shielding:0.20mm Thickness Copper Alloy with Nickel Plated(ROHS).
- Contact:0.35*0.45mm DIA Phosphor Bronze gold Plating Over Nickel(ROHS).

※The product is suitable for wave soldering process

※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

※The Dimensions Marked"▲" Symbols Are Stand For Key Characteristics.

产品客户图 Customer Drw							
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X	±0.35	GLGNET® 深圳市方向电子股份有限公司 Shenzhen GLGNET Electronics Co.,LTD.				
	.XX	±0.25					
	.XXX	±0.15					
	X°	±2°					
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN			品名 TITLE	5921-Q-S-K7-A-1x4-8C-III
张数 SHEET	1/1	纸张 SIZE	校对 CHECKED			料号 ITEM NO.	41122-00XXX1
单位 UNIT	mm	版本 REV.	核准 APPROVE			图号 DWG NO.	GLG-W0-297 GLG-110177