



3		2		1	
NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					



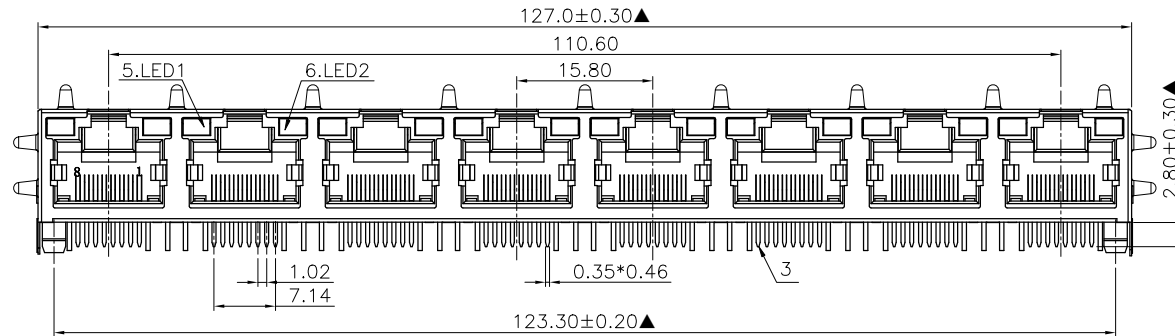


42008-20 X X X 1


规格流水码—
S:半金亮
M:半金雾

电镀代码


- 05-G/F
- 11-3u"
- 15-6u"
- 19-15u"
- 23-30u"

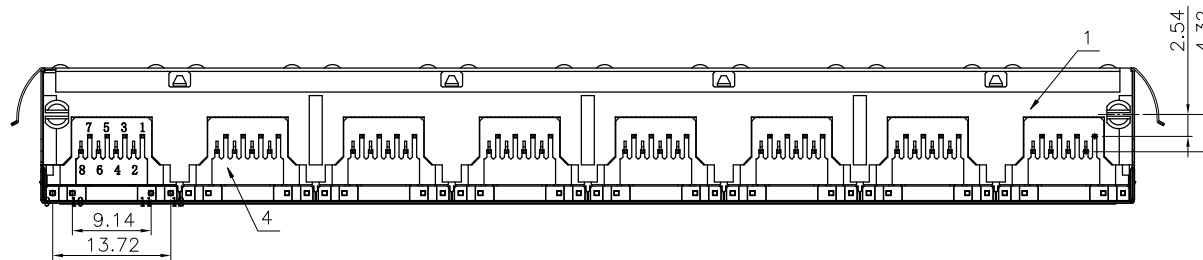

LED PIN DEFINE

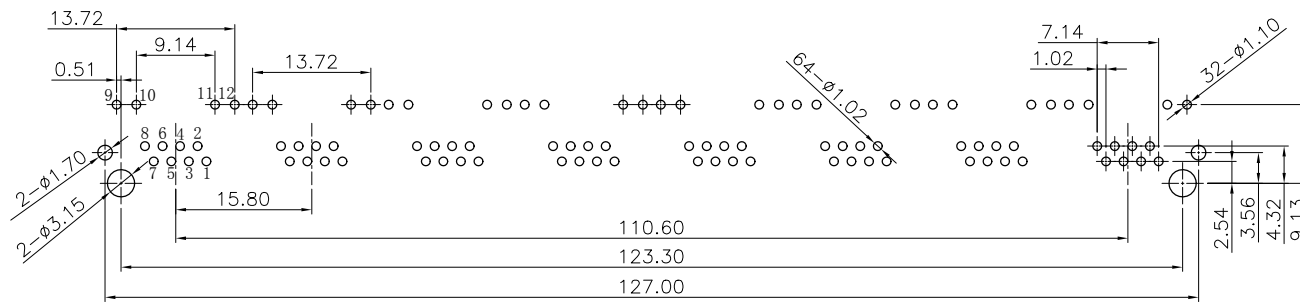

RECOMMENDED P. C. B LAYOUT
TOP VIEW (COMPONENT SIDE)
TOLERANCE ± 0.05

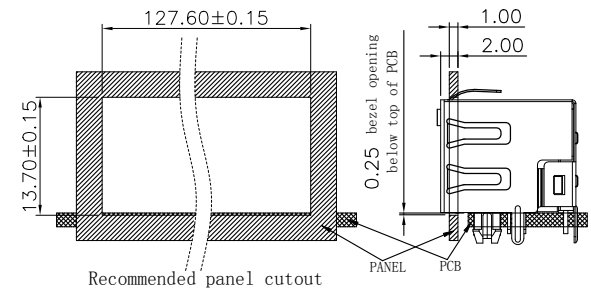

MATERIALS:

1. Housing:Glass Filled PA46 BLACK UL94V-0 (ROHS).
 2. Shielding:0.20mm Thickness Copper Alloy with Nickel Plated(ROHS).
 3. Contact:0.35*0.46mm Phosphor Bronze Gold Plating Over Nickel (ROHS).
 4. Insert:Glass Filled PBT UL94V-0 (ROHS)
 5. LED1:GREEN (RoHS);
 6. LED2:YELLOW (RoHS);
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- ※The Dimensions Marked“▲” Symbols Are Stand For Key Characteristics.

产品客户图 Customer Dwg		未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED X XX XXX X° ±0.35 ±0.25 ±0.15 ±2° GLGNET® 深圳市方向电子股份有限公司 Shenzhen GLGNET Electronics Co.,LTD.					
比例 SCALE	1:1	角法 PROJ.		设计 DESIGN		品名 TITLE	5631-Q-S-F-K13-1x8-L-8C-20 (G/Y)
张数 SHEET	1/1	大小 SIZE	A4	校对 CHECKED		料号 ITEM NO.	42008-20XXX1
单位 UNIT	mm	版本 REV.	A0	核准 APPROVED		图号 DWG NO.	GLG-WL-271