

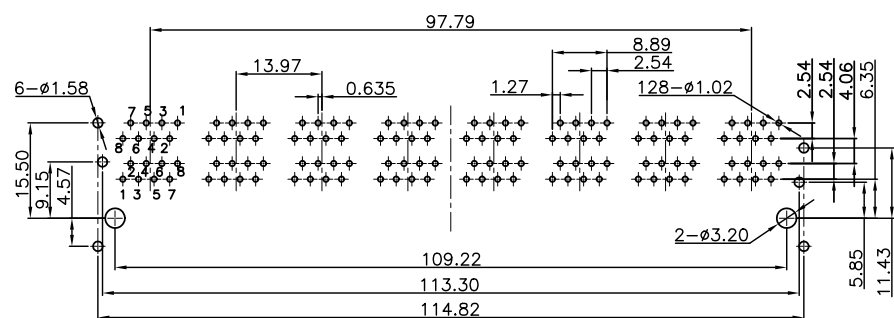
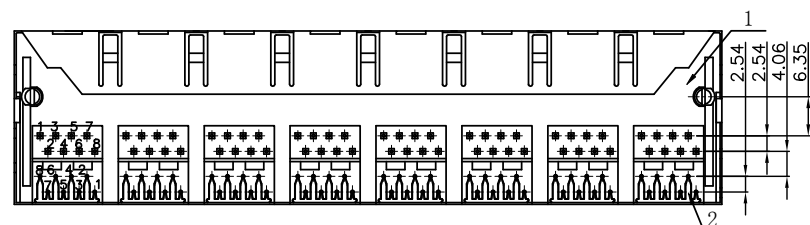
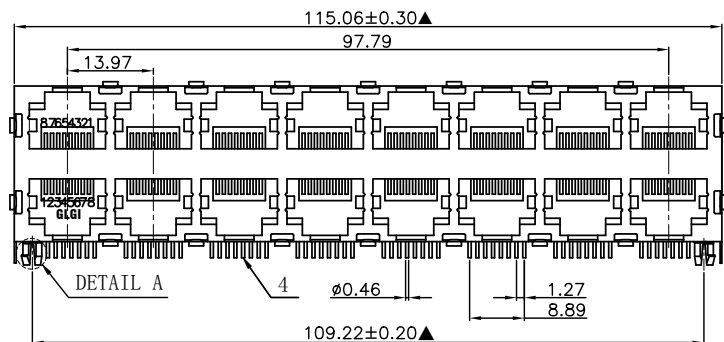


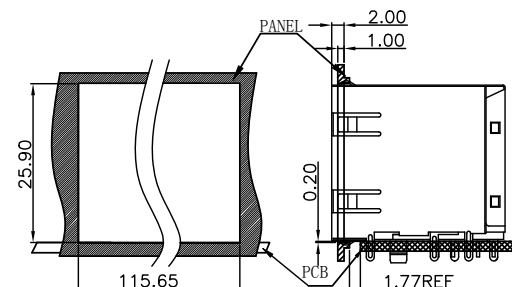


RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE±0.05)

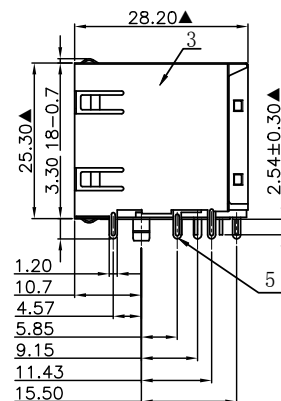

Recommended panel cutout

bezel opening
below top of PCB



DETAIL A
SCALE:4

43062-03 G X X 1

规格流水码

电镀代码
05-G/F
09-2u
11-3u
15-6u
23-30u
31-1.8u

MATERIALS:

- Housing:PA46+30%G. F BLACK UL94V-0(RoHS).
 - Insert:PBT+30%G. F BLACK UL94V-0(RoHS).
 - Shielding:0.20mm Thickness Copper Alloy with Nickel Plated(RoHS).
 - Contact:0.46mm DIA Phosphor Bronze gold Plating Over Nickel(RoHS).
 - Welding post:0.20mm Thickness Copper Alloy with Nickel Plated(RoHS).
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※The Dimensions Marked"▲" Symbols Are Stand For Key Characteristics.

产品客户图 Customer Drw			GLGNET [®] 深圳市方向电子股份有限公司 Shenzhen GLGNET Electronics Co.,LTD.				
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	X	±0.35					
	.X	±0.25					
	.X	±0.15					
	X°	±2°					
比例 SCALE	1:1	角法 PROJ.		设计 DESIGN		品名 TITLE	5921-S-FK18-A-2x8-8C-03
张数 SHEET	1/1	大小 SIZE	A4	校对 CHECKED		料号 ITEM NO.	43062-03GXX1
单位 UNIT	mm	版本 REV.	P0	核准 APPROVED		图号 DWG NO.	GLG-W0-103