
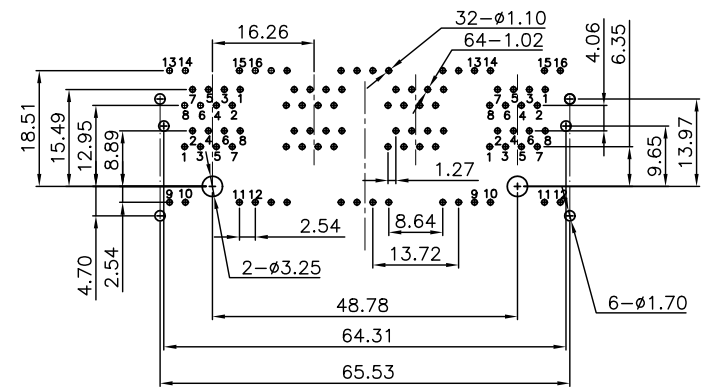
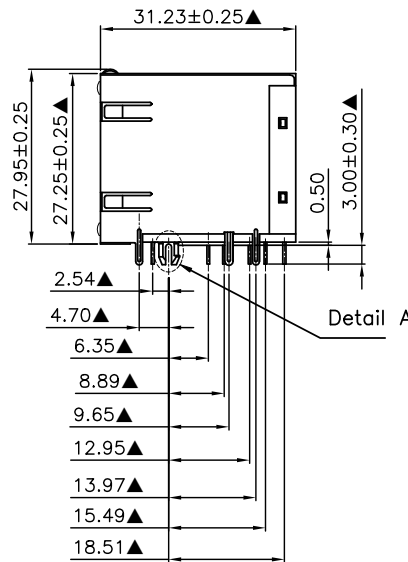


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE

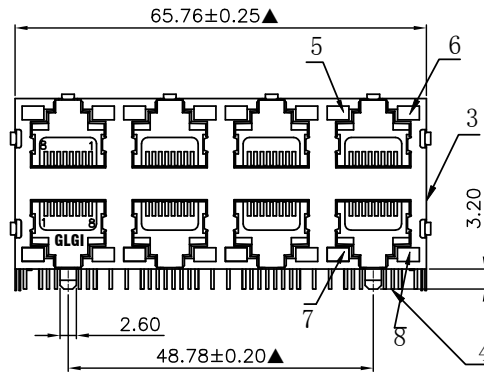

RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE DIM ±0.05)

45020-11GXX1

规格流水码



电镀代码

05-G/F

11-3u"

15-6u"

19-15u"

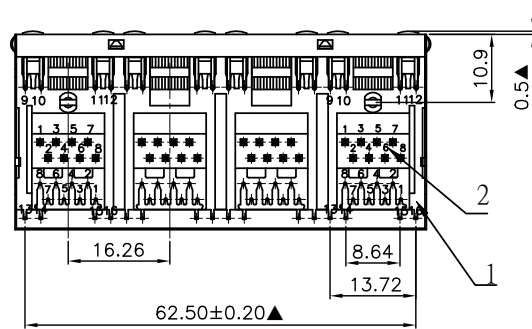

NOTES:


- Housing: Glass Filled NYLON46 Black UL94V-0.
 - Insert: Glass Filled PBT UL94V-0
 - Shielding: Copper Alloy with Nickel Plated.
 - Contact: 0.46mm DIA. Phosphor Bronze, gold flash Plating Over Nickel.
 - Led1: GREEN&YELLOW (RoHS)
 - Led2: GREEN&YELLOW (RoHS)
 - Led3: GREEN&YELLOW (RoHS)
 - Led4: GREEN&YELLOW (RoHS)
 - Durability: 750 Cycles Min;
 - Connector Mating, Unmating Force: 30N Max.
 - Plug Retention Force: 50N min, 60s±5s.
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※The Dimensions Marked "▲" Symbols Are Stand For Key Characteristics.

Electrical specification:

- Voltage Rating: 125 VAC RMS.
- Current Rating: 1.5A Max @25° C;
- Contact Resistance: 20 mΩ Max;
- Insulation Resistance: 500 MΩ Min. @500 VDC;
- Dielectric withstanding Voltage:
1000 V DC or AC peak, for 1 minute 0.5 mA contact-to-contact.
1500 V DC or AC peak, for 1 minute 0.5 mA contact to screen and test panel.

Environmental characteristics:

- Stockpile Temperature: - 40 ° C to 70° C;
- Operating Temperature: - 40 ° C to 70° C;



LED PIN DEFINE

产品客户图 Customer Drw							
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X ±0.35 .XX ±0.25 .XXX ±0.15 X° ±2°	角法 PROJ.	设计 DESIGN	品名 TITLE	5931-S-FK8-2x4-L-c-8C-11 (GY/GY)	张数 SHEET	1/1
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN	品名 TITLE	5931-S-FK8-2x4-L-c-8C-11 (GY/GY)	张数 SHEET	1/1
张数 SHEET	1/1	纸张 SIZE	A4	校对 CHECKED		料号 ITEM NO.	45020-11GXX1
单位 UNIT	mm	版本 REV.	P0	核准 APPROVE		图号 DWG NO.	GLG-WL-021

GLGNET® 深圳市方向电子股份有限公司
SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.